


**IMPORTANT NOTICE**

This drawing and all the information contained is the property of Newell-PSN Insulators. Neither this drawing nor any part of the information contained herein may be copied, exhibited or furnished to others without prior written consent of Newell-PSN Insulators.

Rev.No. 修改号	Revision details/revision note 修改内容	Date 日期	Signature 签字	Approved 批准

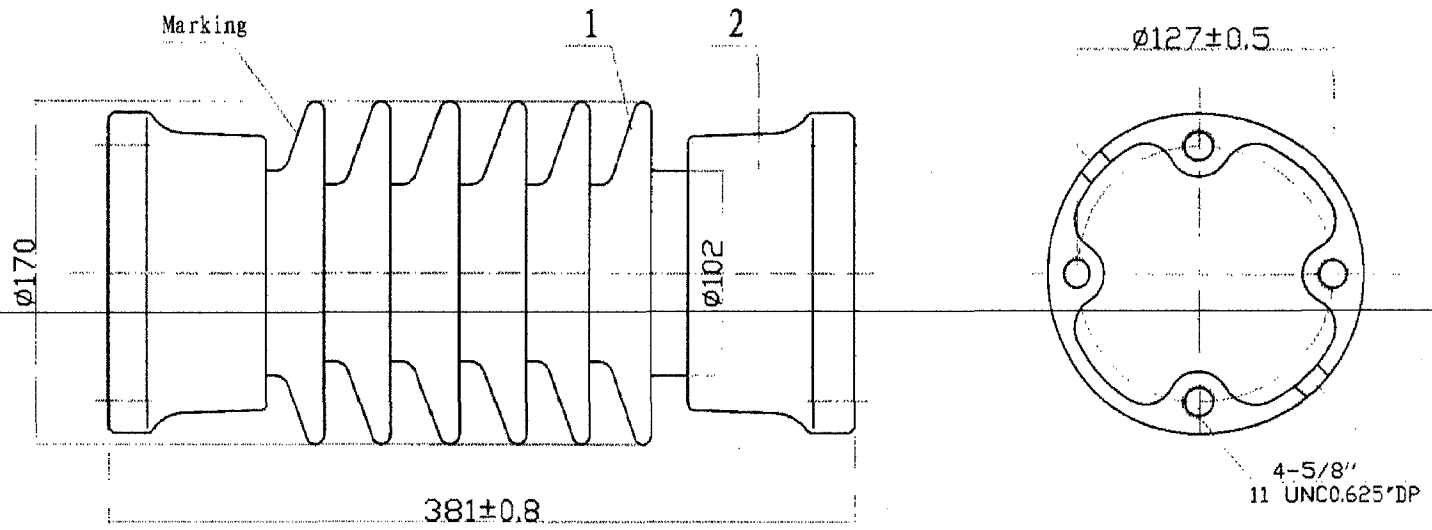

**Technical Specification**

- 1.Min.Nom.Creepage distance:610mm
- 2.Low frequency withstand voltage:wet 60kV
- 3.Impulse withstand voltage:150kV
- 4.Critical impulse flashover voltage:positive 170kV
- 5.Low frequency test voltage15kV,Max.RIV at 1000kHz:100uV
- 6.Ultimate cantilever strength 17.79kN ,Ultimate tensile strength 88.96kN,Ultimate compression strength 88.96kN, Ultimate torsional strength 1810N-m
- 7.Colour of glaze:Grey
- 8.Applicable standards ANSI C29.1 & 29.9

NP

NEWELL-PSN INSULATORS

2	end	2	hot dip galvanized	
1	shell	1	porcelain	
item	title	quantity	note	
Designed by	Checked by	Approved by	Date 2008.11.11	Scale
<div style="font-size: 2em; font-weight: bold;">NP</div> <p>NEWELL-PSN INSULATORS</p>			TITLE	
			Cylindrical solidcore post insulator	
			CAT/ART	
			TR-227	
			DRG No.	
			4206AX	
Material		Issue		
		1		