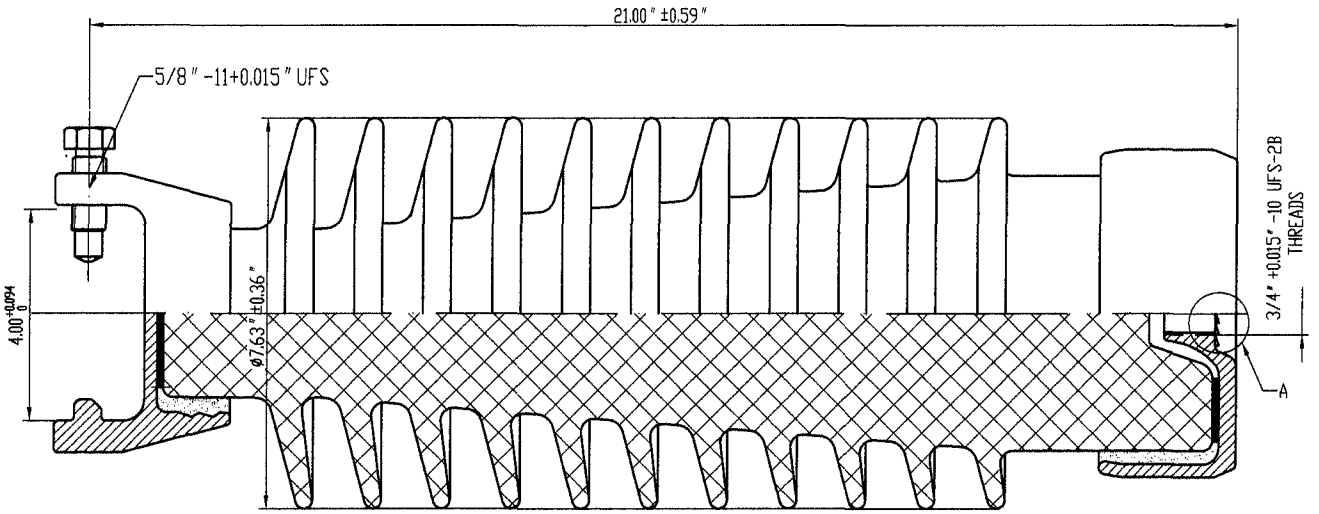



ELECTRICAL CHARACTERISTICS
NOM. VOLTAGE PATING, Kv 69
DRY 60 HZ F.O., kV 175
WET 60 HZ F.O., kV 150
POS. CRITICAL IMPULSE F.O. kV 290
NEG. CRITICAL IMPULSE F.O. kV 380
RIV CHARACTERISTICS
60 Hz TEST VOLTAGE, kV 44
MAX. RIV AT 1000 kHZ, MV 200
MECHANICAL CHARACTERISTICS
CANTILEVER STRENGTH, LBS 2800
CANTILEVER PROOF TEST (MIN.) LBS 1400
PHYSICAL CHARACTERISTICS
LEAKAGE DISTANCE , IN 45
DRY ARCING DISTANCE, IN 17.25
PORCELAIN DIAMETER, IN 7.63
COLOR: GRAY
TESTED PER ANSI C29.1 & ANSI C 29.7

SIGN	QTY	REJIGGER №	NAME	DATE
DRAWN				
CHECKED				
APPROVE				
DATE				

57-15

INSULATOR

DRAWING №

PHASE	SIGN	WEIGHT	SCALE

TOTAL 2 PAGES | PAGE 1

NEWELL-PSN LLC