


508±15.5

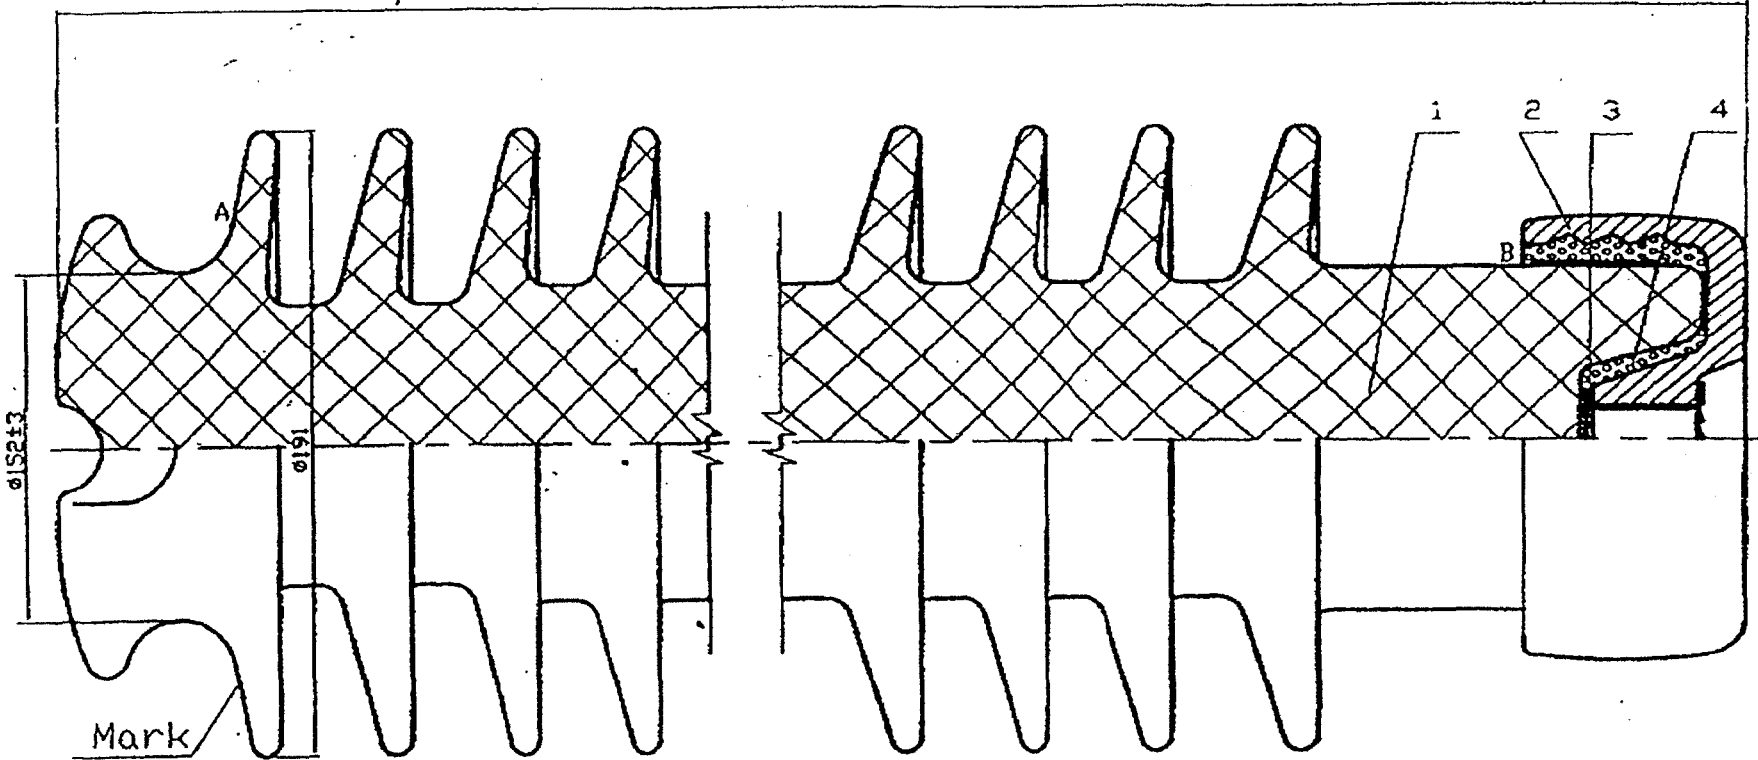

Technical Specification

1. According to the standard ANSI C29.7
2. Nominal creepage distance:1143mm, Arcing distance:438mm
3. Dry low frequency flashover voltage:160kV
4. Wet low frequency flashover voltage:130kV
5. Critical impulse flashover voltage, positive: 265kV
6. Rated cantilever strength: 2800lb
7. Radio interference voltage test voltage: 44kV, Max. RIV. at 1MHz: 200uV

1. Porcelain 2. Basement 3. Crusion 4 Cement

ANSI 57 - 5		41670-7001	
Line Post Porcelain Insulator	WEIGHT	UNIT	
	21.3KG	MM	
ASSEMBLY DRAWING		Newell-PSN	