


597±18.2

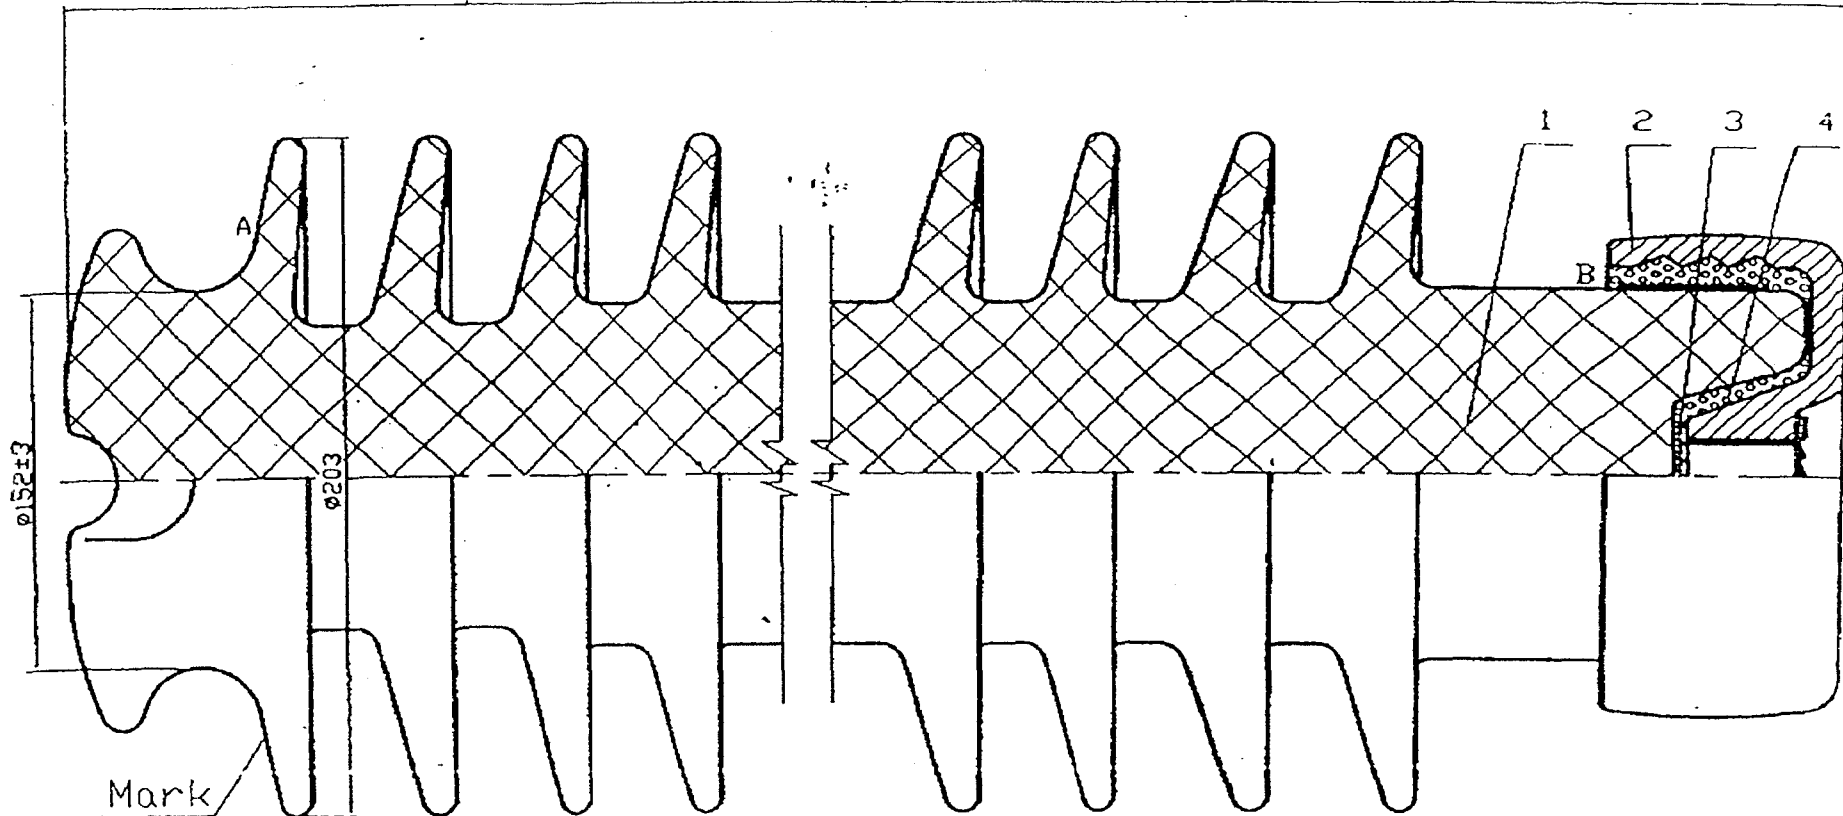

### Technical Specification

1. According to the standard ANSI C29.7
2. Nominal creepage distance:1346mm, Arcing distance:489mm
3. Dry low frequency flashover voltage:180kV
4. Wet low frequency flashover voltage:150kV
5. Critical impulse flashover voltage, positive: 300kV
6. Rated cantilever strength: 2800lb
7. Radio interference voltage test voltage: 44kV, Max. RIV. at 1MHz: 200uV

1. Porcelain 2. Basement 3. Crusion 4 Cement

<b>ANSI 57 - 6</b>	<b>41690</b>	
Line Post Porcelain Insulator	<b>WEIGHT</b>	<b>UNIT</b>
	<b>26.3KG</b>	<b>MM</b>
<b>ASSEMBLY DRAWING</b>	<b>Newell-PSN</b>	