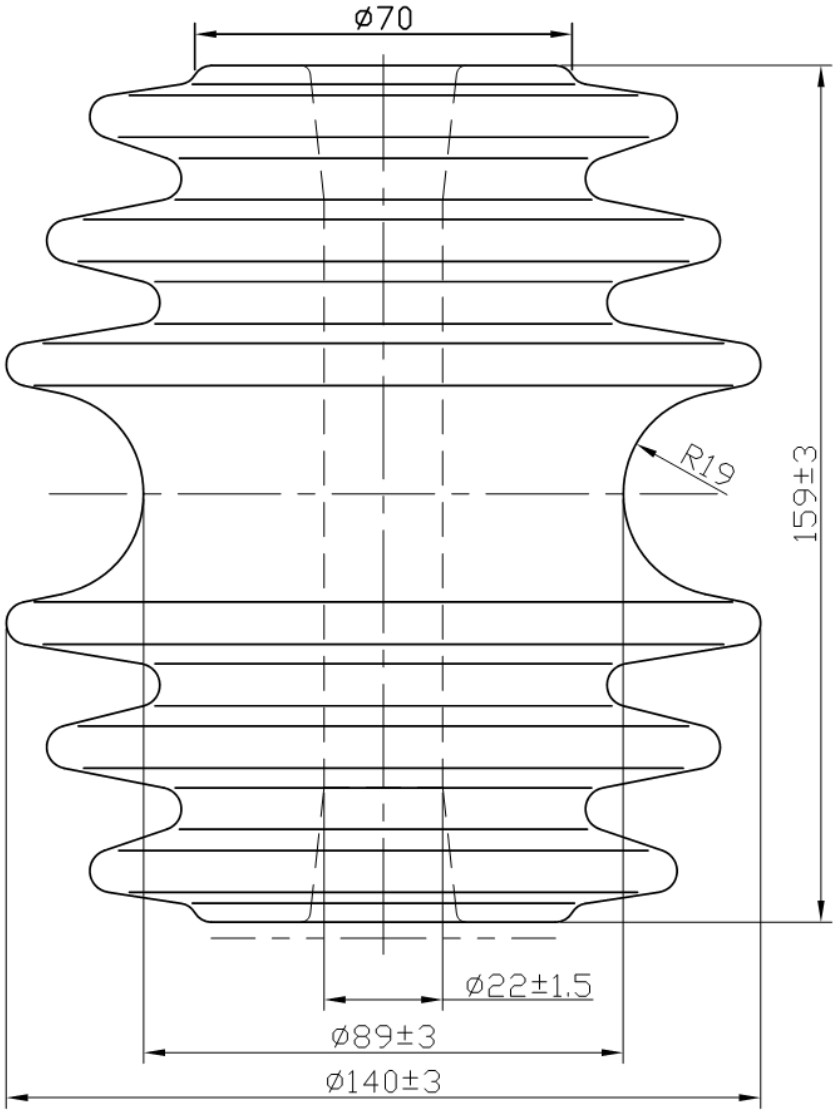

TECHNICAL DATA:

Type		ANSI 53-5A
Standards Applied		ANSI C29.3
Main dimensions	D:	140mm
	H:	159mm
	d:	89mm
	R:	19mm
	d1:	22mm
Mechanical failing load		35.6kN
Low frequency Dry flashover voltage		45kV
Low frequency Wet flashover voltage	(Vertical)	35kV
	(Horizontal)	40kV
Impulse flashover voltage	(Pos)	67kV
	(Neg)	76kV

Visual Inspection According to IEC 383

*****MATERIAL:PORCELAIN

MANUFACTURER: NEWELL-PSN LLC

DESINGN		DRAWING	CY2.828.054
CHECK		REVISION	Jan. 20, 2014
ISSUED			

SPOOL INSULATORS
2335350-7001 (53-5)