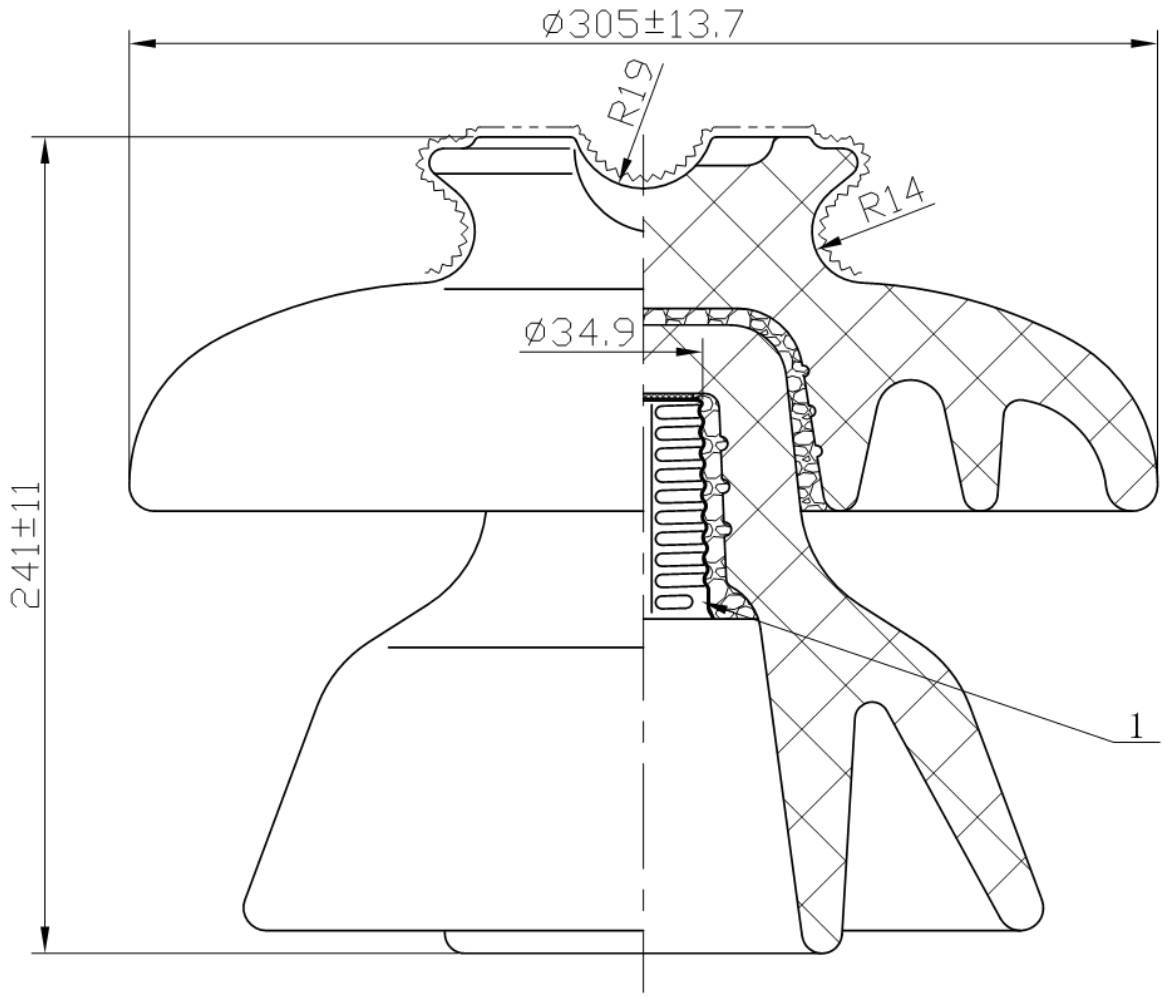

TECHNICAL DATA

Type	ANSI56-4
Standard Applied	ANSI C29.6
Main Dimensions	
D:	305mm
H:	241mm
Creepage distance	686mm
Dry arcing distance	286mm
Cantilever strength Load	13kN
Low frequency Wet flashover voltage	95kV
Low frequency Dry flashover voltage	140kV
Critical impulse flashover voltage (Positive)	225kV
(Negaitve)	310kV
Power-Frequency puncture voltage	185kV
Radio-Influence voltage	
Test voltage to ground	30kV
Max. RIV at 1000kHz	200 μ V

****** MATERIAL:(1)THIMBLE OF ZINC

MANUFACTURER: NEWELL-PSN LLC

DESIGN		DRAWING	3CY2.805.044	PIN TYPE INSULATORS FOR HIGH VOLTAGE
CHECK		REVISION	Jun. 18, 2003	2365640-7001 (56-4)
ISSUED				