

CODE 7001 & 7301

### ELECTRICAL CHARACTERISTICS

NOM. VOLTAGE RATING, KV -----	69
DRY 60 HZ F.O., KV -----	160
WET 60 HZ F.O., KV -----	145
POS. CRITICAL IMPULSE F.O., KV -----	275
NEG. CRITICAL IMPULSE F.O., KV -----	365

### RIV CHARACTERISTICS


60 HZ TEST VOLTAGE, KV rms -----	44
MAX. RIV AT 1000 KHZ, microvolts -----	200

### MECHANICAL CHARACTERISTICS

CANTILEVER STRENGTH, LBS -----	2800
CANTILEVER PROOF TEST (MIN), LBS -----	1400

### PHYSICAL CHARACTERISTICS

LEAKAGE DISTANCE, IN -----	42
DRY ARCING DISTANCE, IN -----	16
NET WEIGHT, LBS -----	50
PORCELAIN DIAMETER, IN -----	7.63
NUMBER OF PETTICOATS -----	10

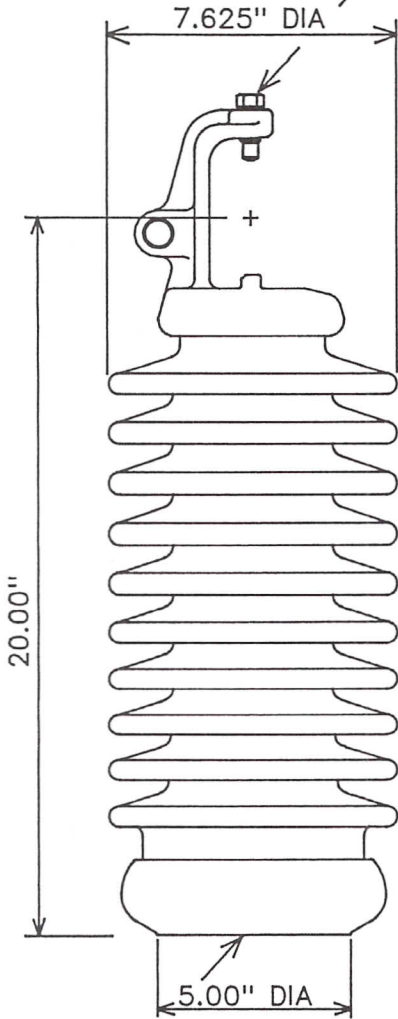

3/4" -10 UFS-2B THREADS



CODE 7201 & 7401

ISSUED BY DRAFTING DEPT.  
CORRECT AS OF 5/20/94  
BY B

7401	ANSI-70 GREY GLAZE, STL. PINTLE BLT W/STL JAM NUT
7301	ANSI-70 GREY GLAZE, ST. STL. PINTLE BLT W/STL LOCKWASHER
7201	ANSI-70 GREY GLAZE, AL. PINTLE BLT W/STL JAM NUT
7001	ANSI-70 GREY GLAZE, STL. PINTLE BLT W/STL LOCKWASHER
CODE	DESCRIPTION

HORIZONTAL CLAMP-TOP  
LINE POST

DRFTMN: JB	APPRVD: <u>BL5/19/94</u>
ISSUE: C	DATE: 5/9/94
DRAWING NO.	CODE
048666	SEE TABLE